

Tap-Densitometer KDM01

tap-density measurement according to DIN ISO 3953

Application / Features

tap-density measurement acc. to DIN ISO 3953 :

- in particular of ductile metal-flakes
- other flake-like powder and mixtures
- equiaxial powder and powder in general
- automatic operation with 3 tap-frequencies
- standard-laboratory test-cylinders (25-100ml)
- reproducibility, quality-control
- easy cleaning and maintenance

Technical Data, Dimensions



L x B x H (without testcyl.)	390 x 380 x 270
net weight	17 kg
test-cylinder	25/100 ml
tap-frequency	100 / 200 / 300 Hz
shift	3 mm
drive power	55 W
electrical control	24V-110/220VAC

Options

- alternative test-cylinders and adapters
- fine-scale 500 g



Tap-Densitometer KDM01 with test-cylinders 25 & 100ml

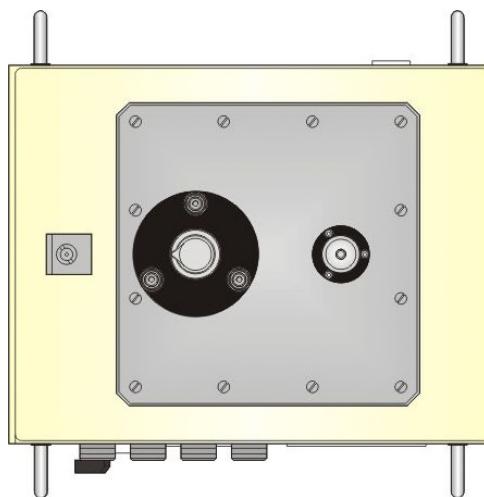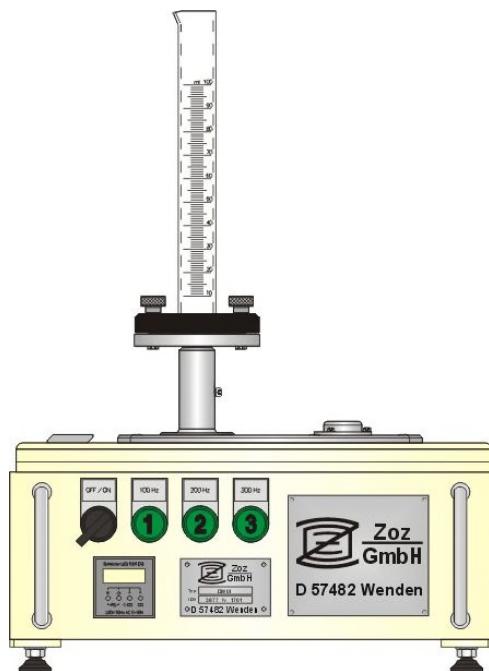

technical data subject to alteration