



Adapter KF-A - fitting transition -

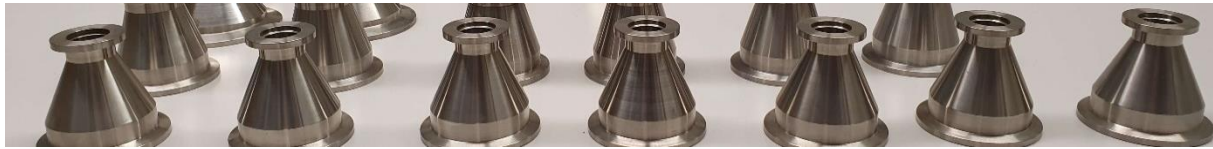

application

KF-A adapter forms the appropriate bridge for KF assemblies of different nominal sizes in the transfer of powders, granules and multi-phase flows in aerodynamic systems of continuous / semi-continuous processes as well as in batch operation. Transitions without shading, steep cone angle.

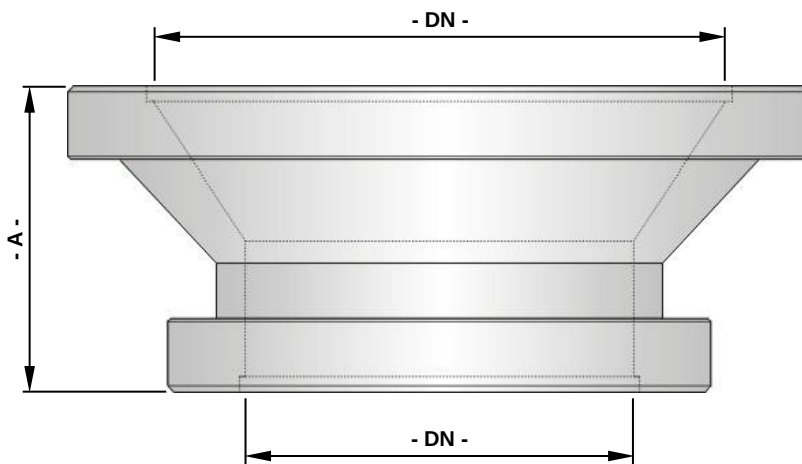

technical data, dimensions

large flange	DN100	DN63	DN50	DN40	DN25
reduced flange	DN63				
reduced flange	DN50	DN50			
reduced flange		DN40	DN40		
reduced flange		DN25	DN25	DN25	
reduced flange		DN16	DN16	DN16	DN16
unit length -A- [mm]	50	50	45	50	40
weight approx. [kg]	1.3	0.5	0.3	0.2	0.1
ports	standard-KF				
operation pressure	2 bar max.				
material	stainless steel 1.4301				
definition example	Adapter DN63-DN25x50				

