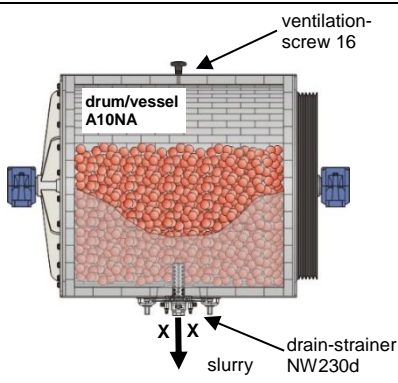
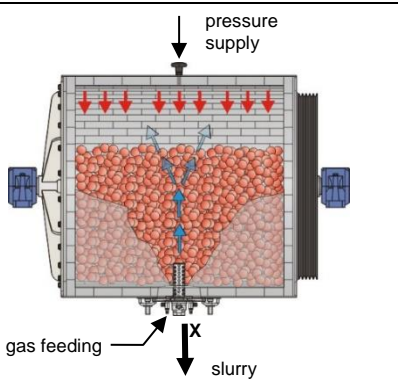
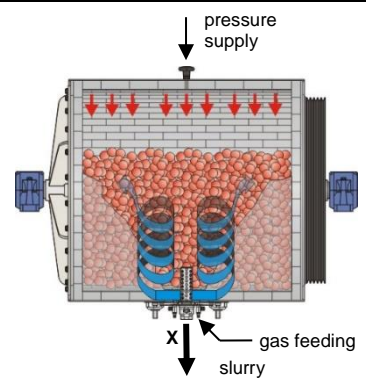
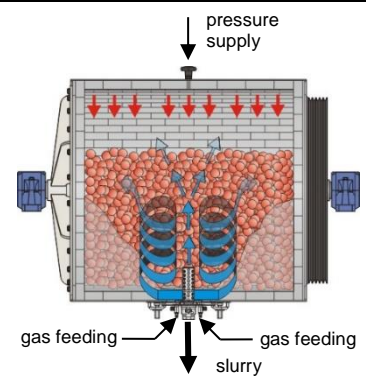
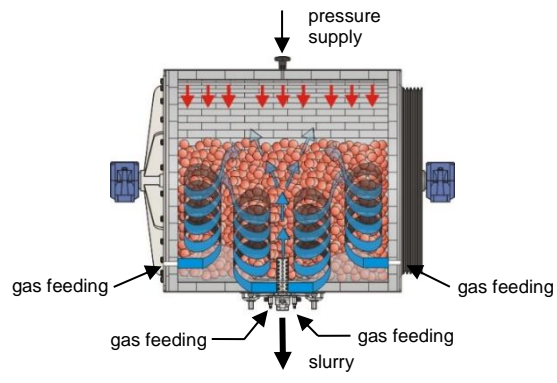
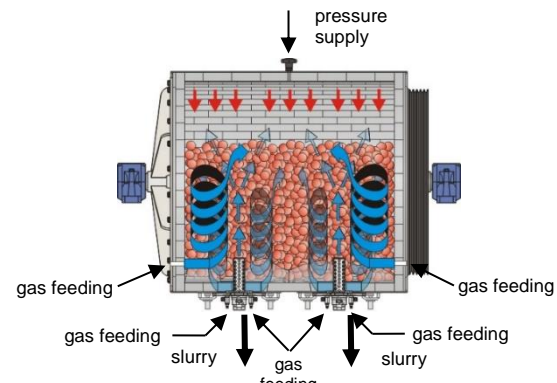


Discharging of Drummills

after wet-operation of high-viscose and/or thixotropic fluxes/slurries
 utilizing drain-strainer NW(T)**

without vessel/drum modification, no retrofitting of existing drummills	
<ul style="list-style-type: none"> • ventilation port/valve open • auxiliary pipe and ring nozzle closed =>standard discharging procedure (not for porcelain pans)	<ul style="list-style-type: none"> • gas feeding through auxiliary pipe • ring nozzle closed • pressure supply through ventilation port
	
<ul style="list-style-type: none"> • gas feeding through ring nozzle, auxiliary pipe closed • pressure supply through ventilation port 	<ul style="list-style-type: none"> • gas feeding through auxiliary pipe and ring nozzle • pressure supply through ventilation port
	
with vessel/drum modification	
<ul style="list-style-type: none"> • gas feeding through auxiliary pipe and ring nozzle • gas feeding through lateral ventilation ports • pressure supply through ventilation port 	<ul style="list-style-type: none"> • gas feeding via auxiliary pipe, ring nozzle + lateral ports • pressure supply through ventilation ports • using two or more main ports
	

technical data subject to alterations