


Glass-Tube-Container GTC-DN100

insitu supervision particularly of low-dense products



technical data, dimensions								
unit size	01	02	03	04	05	06	07	L650
volume [l]	1	2	3	4	5	6	7	3.8
unit length [mm]	300	425	550	675	800	925	1050	650
block size [mm]	160x130/197/273							
glass tube	110 x 5 mm, acrylic glass							
ports main	DN100-G3/D80							
bottom nozzle (BD)	8x D1.5 (gas flow & -blow)							
auxiliary port (BD)	DN16							
net weight [kg]	13.1	13.8	14.5	15.1	15.8	16.5	17.2	15.0
max. load [kg]	10	20	30	40	50	60	70	40
type -m	electric drive unit for ball-valve to be added, net-weight is plus 14 kg							
ports	standard-KF							
operation pressure	1 bar max., evacuation max. 3×10^{-1} hPa							
operation temp.	45°C max.							
material	stainless steel 1.4301/Al5083/acrylic glass/silica glass (adds to weight)							
seals	NBR/PTFE							
definition example	glass-tube-container GTC-DN100-04 (standard, volume 4 liter) glass-tube-container GTC-DN100 x 650 (custom., unit length 650 mm)							

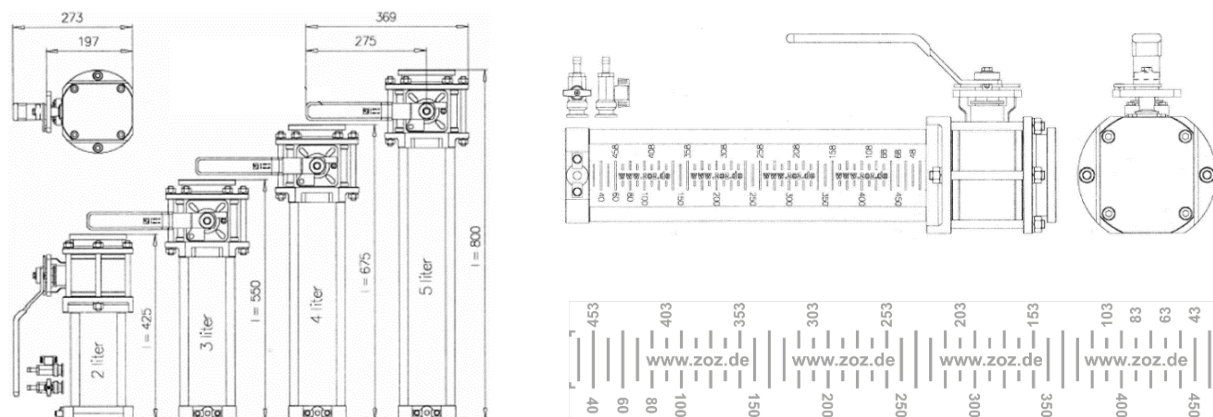

technical data subject to alterations