


drain-strainer NWT for drummills / porcelain pans

application


discharging of drum-mills with porcelain-pan after wet-milling

- auxiliary pipe and valve (types b and d) at the drain-strainer can replace the ventilation valve that is not available at porcelain-pans;
- ring nozzle with auxiliary valve (types c and d) at the drain-strainer for a circle-like gas-feeding;
- auxiliary pipe and ring nozzle (type d) allow the tuning of circle-like gas supply with respect to entire gas feeding.

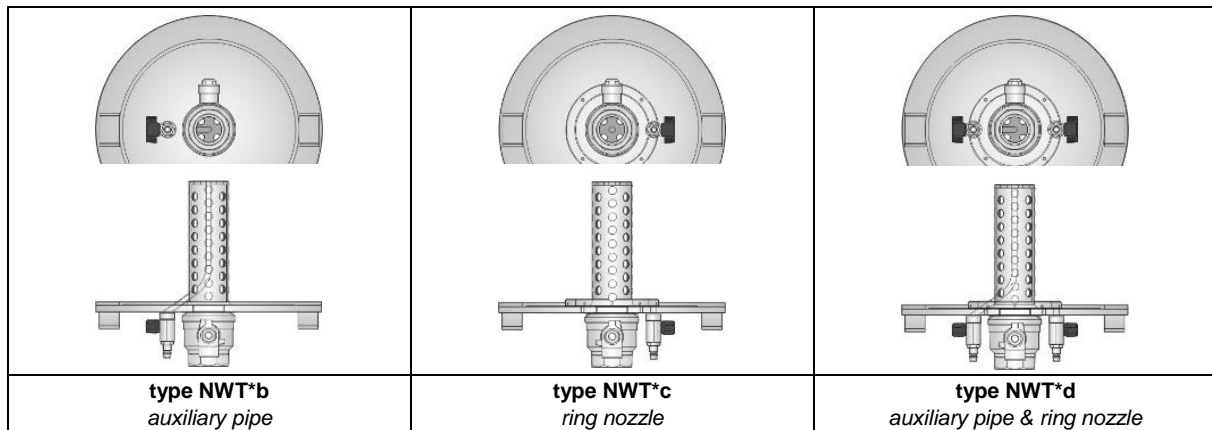

advanced	dimensions				for all unit sizes		
<ul style="list-style-type: none"> • ventilation and/or pressure supply of vessel/drum; • interruption-free discharging; • fast & successful discharging of high-viscose and thixotropic fluxes. 	unit size	for porcelain pan [l]	gateway lance*	weight	main valve	G 1½	all types
	NWT170	40, 100	51 cm²	6 kg	aux. valve	G ¾	hosepipe 9x12
	NWT180	30, 60, 90, 115, 150, 235	51 cm²	6 kg	gateway aux. pipe	0.3 cm²	type b + d
	NWT200	200, 250, 400	80 cm²	6.5 kg	gateway ring nozzle	0.7 cm²	type c + d
	NWT270	630, 1000	80 cm²	7.5 kg	material	1.4301/Ms	

technical data subject to alterations

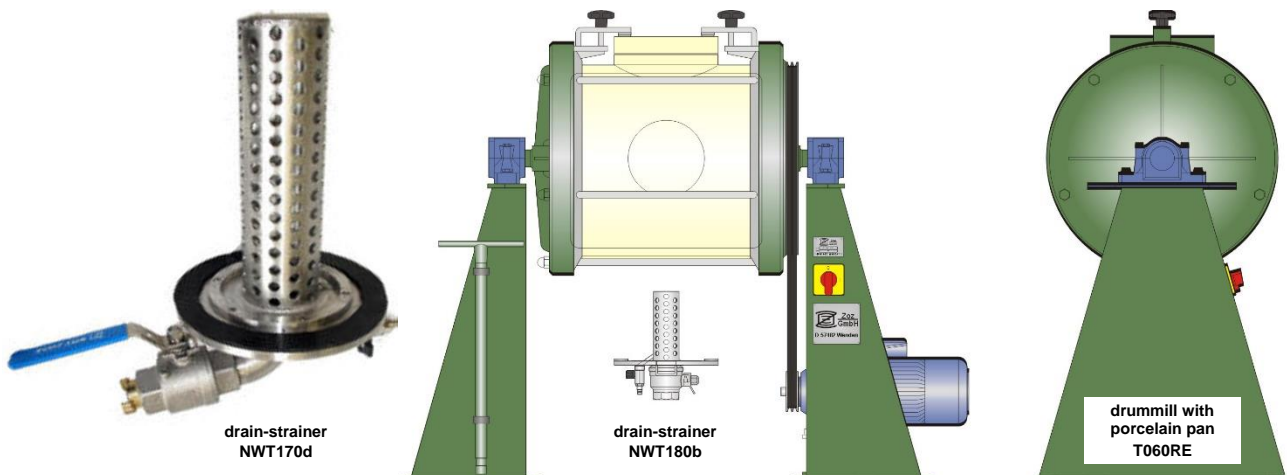

accessories/options	safety note, types b, c and d
<ul style="list-style-type: none"> • box-spanner for main-valve; • fixings for box-spanner at drummill (set); • quick-connectors for auxiliary-valve with pipe-fitting; • coating of drain-strainer, ceramic, PTFE, rubber, plastics. 	<ul style="list-style-type: none"> ➤ maximum operation pressure of vessel/drum must not be exceeded at any time ! • a corresponding safety-valve must be built into the gas-supply; • possibly the vessel shall be equipped with a safety-valve, too.