

grinding media chute KRA, KRW for drummills

grinding media chute KRA and KRW with module units ASW and MVA

discharging product & grinding media from drummills

(a) grinding media chute KRA-A25

For unloading entire batches with soft grinding media catch. Media guide through web strips, media brake-console with soundproofing. Inclination angle and ball sorting adjustable, spray bars for insitu grinding media cleaning. Splash and impact protection.

(b) deposition sieve tank ASW-190


Adjustable perforated/sieve trays for product and slurry, large settling volume, flushing device and splash protection. Slurry pump and slurry collection tank.

(c) grinding media sorting unit MVA-4-25

Inclination angle and ball sorting adjustable, quad-ball-outlet, in this case to Mobile Containers FB500a (e).

(d) grind. media chute on mob. cart KRW-NAPW50

Mobile unit for retrofitting existing mills, in this case up to unit size 5.

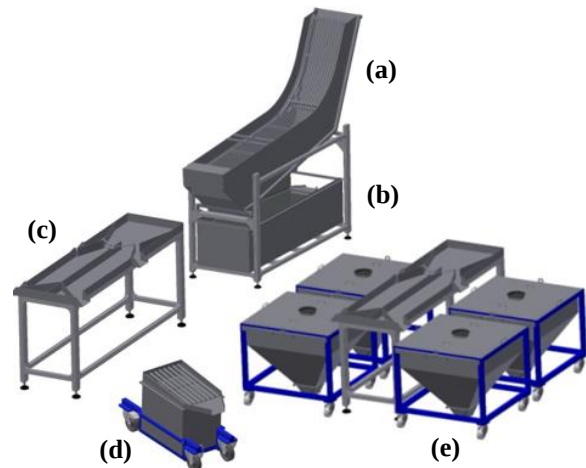

technical key data

module unit	dim. L x B x H [mm]	weight [kg]	material
grinding media chute KRA-A25	3840 x 1050 x 2950	560	1.4301, frame Al
deposition sieve tank ASW-190	2600 x 865 x 850	200	stainless steel 1.4301
grinding media sorting unit MVA-4-25	2550 x 890 x 1210	150	1.4301, frame Al
grinding media chute on mobile cart KRW-NAPW50	750 x 350 x 460	45	1.4301, frame steel powder coated



technical data subject to alterations